


PRODUCT DATA SHEET  
TILE TRIMS



## PRODUCT DATA SHEET

### TILE TRIM – BSG 0808 SS

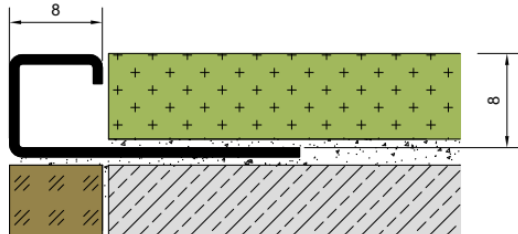

### GENERAL CHARACTERISTICS

<b>Category</b>	<b>Finishing Profiles</b>
<b>Product</b>	<b>Tile Trim</b>
<b>Product Code</b>	<b>BSG 0808 SS</b>
<b>Type</b>	<b>Wide Brimmed</b>
<b>Applicable Areas</b>	<b>Floor and Wall</b>
<b>Visible Width</b>	<b>8,00 mm</b>
<b>Inner Height</b>	<b>8,00 mm</b>
<b>Standard Length</b>	<b>2,50 or 2,44 meters</b>
<b>Material</b>	<b>Stainless steel</b>
<b>Steel Grade</b>	<b>Grade 304 ( Grade 316 optional )</b>
<b>Finish</b>	<b>Different finishes are available</b>
<b>Quantity</b>	<b>10 pcs / pack</b>

✓ Asdekor Tile Trims are used at the junctions of tile to tile or tile to non-tile covered surfaces to protect external corners and ensure smooth finish.

✓ As well as protection feature, tile trims bring in the applied areas an aesthetic view with different colors and shorten the laying time for tiles by simplifying the alignment.

✓ Tile trims can be manufactured at different shapes, heights and colors.

## STAINLESS STEEL COLORS

	<b>SS01</b>	<b>Silver / Satine</b>
	<b>SS02</b>	<b>Gold / Matt</b>
	<b>SS03</b>	<b>Bronze / Matt</b>
	<b>SS04</b>	<b>Black / Matt</b>
	<b>SS05</b>	<b>Silver / Polished</b>
	<b>SS06</b>	<b>Gold / Polished</b>
	<b>SS07</b>	<b>Bronze / Polished</b>
	<b>SS08</b>	<b>Black / Polished</b>
	<b>SS21</b>	<b>Silver / Mirror Finish</b>

## STAINLESS STEEL CHEMICAL COMPOSITION

<b>C</b>	<b>% 0,08 maximum</b>
<b>Cr</b>	<b>% 18,00 - 20,00</b>
<b>Fe</b>	<b>% 66,34 – 74,00</b>
<b>Mn</b>	<b>% 2,00 maximum</b>
<b>Ni</b>	<b>% 8,00 – 10,50</b>
<b>P</b>	<b>% 0,045 maximum</b>
<b>S</b>	<b>% 0,03 maximum</b>
<b>Si</b>	<b>% 1,00 maximum</b>

## STAINLESS STEEL TECHNICAL SPECIFICATIONS

<b>Standard</b>	<b>EN ISO 3651/2-A</b> <b>EN ISO 3651/2-B</b>
<b>Melting temperature</b>	<b>1400°C</b>
<b>Tensile strength</b>	<b>650 Mpa</b>
<b>Elongation (5) (50 mm)</b>	<b>% 45</b>
<b>Hardness (HB)</b>	<b>90</b>
<b>Density</b>	<b>8 Kg / dm<sup>3</sup></b>
<b>Elasticity modulus</b>	<b>200 Gpa</b>
<b>Heat conductivity</b>	<b>16,2 W/m/K</b>
<b>Dilatation coefficient</b>	<b>16,9 µm/m/K</b>
<b>Electrical resistance (20°)</b>	<b>72 microhm*cm</b>
<b>Corrosion resistance</b>	<b>According to EN ISO 3651/2-A</b>