


PRODUCT DATA SHEET
TILE TRIMS



PRODUCT DATA SHEET

TILE TRIM – BSK 1008

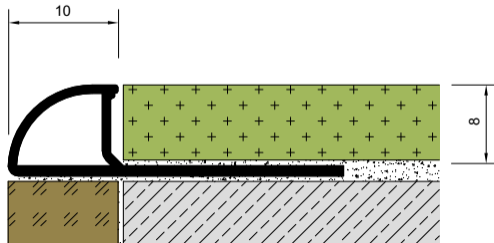

GENERAL CHARACTERISTICS





Category	Finishing Profiles
Product	Tile Trim
Product Code	BSK 1008
Type	Closed edged
Applicable Areas	Wall
Visible Width	10,00 mm
Inner Height	8,00 mm
Standard Length	2,70 meters
Material	PVC
Finish	Different colors
Quantity	100 pcs / pack

✓ Asdekor Tile Trims are used at the junctions of tile to tile or tile to non-tile covered surfaces to protect external corners and ensure smooth finish.

✓ As well as protection feature, tile trims bring in the applied areas an aesthetic view with different colors and shorten the laying time for tiles by simplifying the alignment.

✓ Tile trims can be manufactured at different heights and colors.

STANDARD COLORS

	P30	White (Opaque)
	P32	Beige
	P38	Gray
	P44	Cream

PVC TECHNICAL SPECIFICATIONS

Density	1380 kg/m ³
Young's Modulus (E)	2900 - 3400 MPa
Elongation at break	20 - 40 %
Notch Test	2 - 5 kJ/m ²
Glass Temperature	87°C
Melting Point	212°C
Vicat B ¹	85°C
Heat Transfer Coefficient	0.16 W/m.K
Linear Expansion Coefficient	8x10 ⁻⁵ /K
Specific Heat	0.9 kJ/kg.K
Water Absorption (ASTM)	0.04 - 0.40